


## DATA SHEET

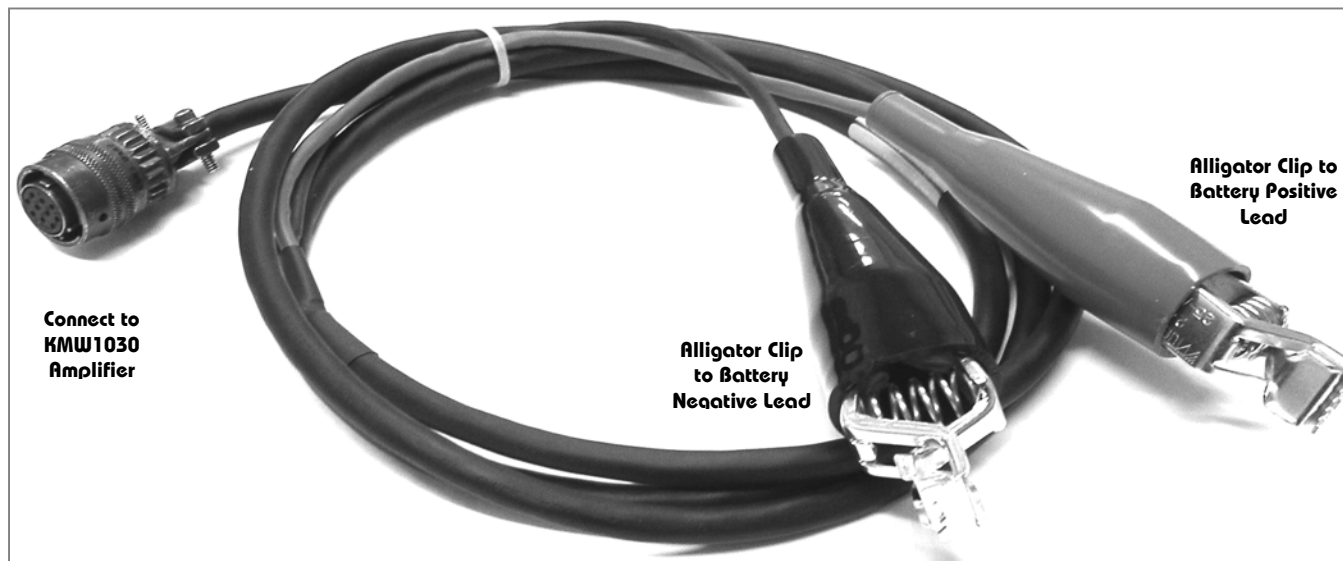

### SPECIFICATIONS:

This cable assembly is designed for field operation and enables the users to connect the AR Worldwide KMW1030 Amplifier Series to the military's High Mobility Multipurpose Wheeled Vehicle (HMMWV) battery system using alligator clips.

<b>Manufacturer PN:</b>	4-68-446-720 (6ft) or 4-68-446-120 (10ft)
<b>Part Description:</b>	24VDC Power Cable with Alligator Clips
<b>Overall Length:</b>	72.00in (182.88cm) or 120in (304.80cm)
<b>Cable Type:</b>	
<i>Gauge &amp; Style:</i>	16 AWG, North American
<i>Rated Temperature:</i>	-50°C to 105°C
<i>Rated Voltage &amp; Current:</i>	300VAC, 13Amps/Conductor
<i>Material &amp; Color:</i>	TPE, Black
<i>Approved:</i>	UL 62, SJEOW (UL)/SJTO (CSA)
<b>Battery Connector:</b>	
<i>Connector Type:</i>	Standard Alligator Clips
<i>Connector Shell:</i>	Rubber,
<i>Connector Color:</i>	Red (Positive) and Black (Negative)
<b>Power Connector:</b>	
<i>Contact Type:</i>	High Conductivity Gold Plated Contacts
<i>Connector Shell:</i>	Rugged Aluminum
<i>Shell Color:</i>	Bronze
<i>Connector Type:</i>	Twisted Lock Plug
<i>Rated Temperature:</i>	125°C

DOC # 7-98-446-000  
REV: A